This TAS adaptor can be used to change the depth profile as function of e.g. speed

Fiber cable

Active part of TAS
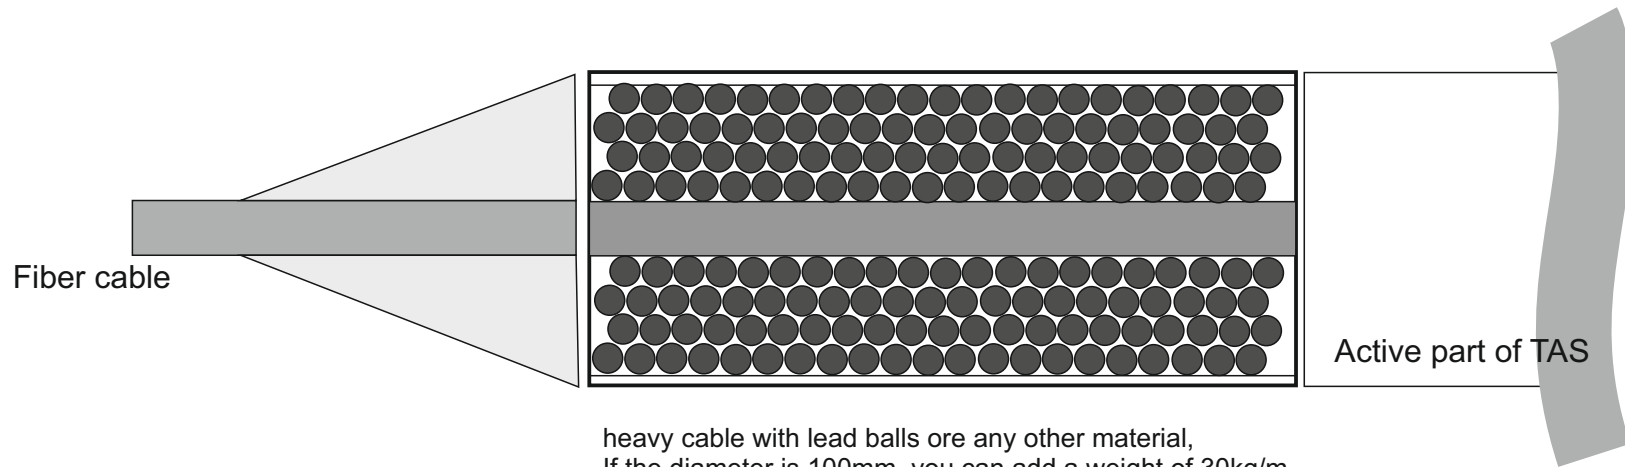
heavy cable with lead balls ore any other material,
If the diameter is 100mm, you can add a weight of 30kg/m
by filling the space with lead balls and oil. Using Oil ore aother liquit maintain the flexibility

If you add a 10 meter spacer designed for blue water,
you would have an inline weight of 300 kg extra

C. Nielsen 5th oct. 2018